


GP001/AB/G3
Heavy Duty Contact

**GRADE 3
COMPLIANT**



- High Quality Alloy Finish
- Double pole configuration
- Pre-resistored (A,B)
- Other resistor value available
- 57cm Armoured cable lengths
- Magnetic Detection
- EN50131-2-6 Grade 3
- Environmental Class II

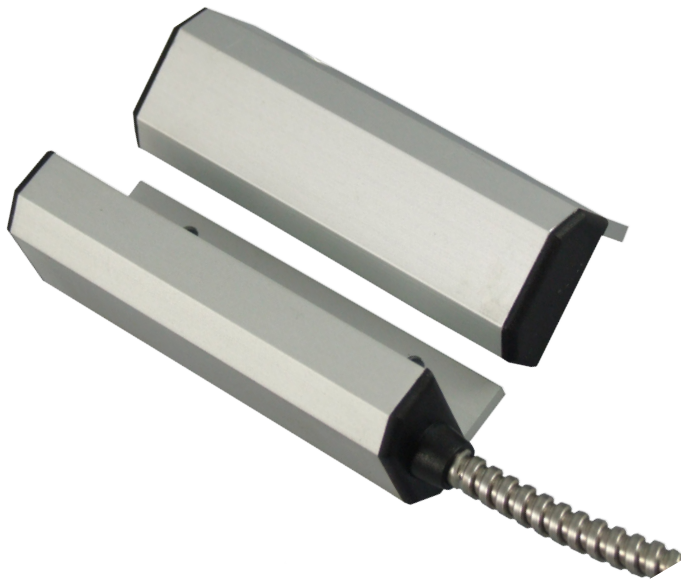

Specifications

GP001/AB Grade 3

Connections	8 Core x 7/0.2 Copper Cable	Voltage Range	12Vdc
Armoured Cable Length	570mm	Switching Current	500mA @ 12Vdc
Reed Switches	1	Contact Material	Rhodium
Pull-in Gap	10mm	Colours	Brushed Aluminium
Material	Aluminium / ABS	Tamper	Cover & Optional RFMS
Contact Size	85 x 27 x 26mm	Magnetic Detection	Yes
Magnet Size	85 x 27 x 26mm	Standards	EN50131-2-6 Grade 3
Contact Form	SPST form A	Environmental Class	II



Contact us:

Phone:

Tel: +44(0)151 6061000
Fax: +44(0)151 6061122

Online:

Web: www.cqr.co.uk
Email: info@cqr.co.uk

Address: CQR Fire & Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK.

